

BR HOME
ARIEL SCONCE



STYLE # 6002207



SMALL OR MEDIUM OR LARGE

DIMENSIONS

Small	15" x 15" x 6"
Medium	20" x 20" x 8"
Large	24" x 24" x 9"

RATING

Max Wattage	60-watt maximum
Bulbs (Not Included)	Type A, Medium base




PARTS ENCLOSED

- (A) Mounting Plate
- (B) Threaded Bar
- (E) Mounting Screws (x2)
- (F) Thumb Screws (x2)
- (G) Fixture Base Plate
- (H) Sconce
- (I) Socket (x3, x2, OR x1)
- (J) Mounting Holes

PARTS NOT INCLUDED

- (B) Wall Anchors (x3)
- (C) Anchor Screws (x3)
- (K) Light bulb

Please consult your local hardware store for guidance on the correct anchor and screws for your wall type.

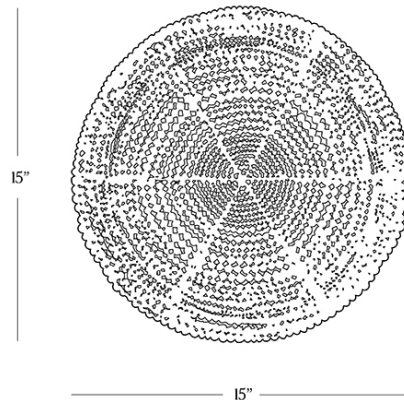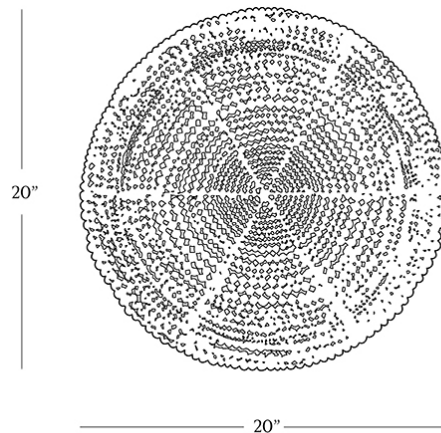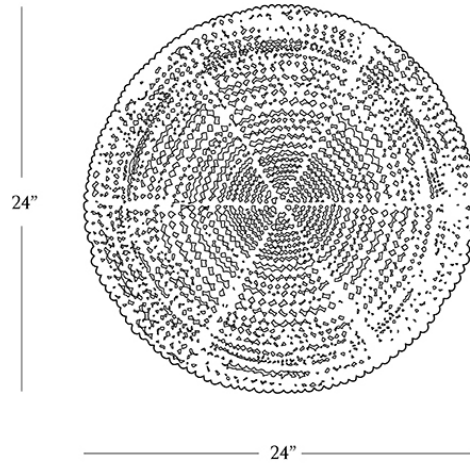

SMALL OR MEDIUM OR LARGE

DETAILS

Carrying the fingerprints of their makers, each clay bead used in this lighting piece is hand-formed by women in Kwa-Zulu Natal, South Africa. Using only natural materials, these women craft lighting pieces that celebrate the beauty of imperfection and create economic opportunity for their community.

- Handcrafted from metal and hand-formed clay beads.
- Rated for 100W max Type A bulbs (not included); hardwire fixture, professional installation recommended.
- Handmade in South Africa.

CARE

- Dust regularly with a soft, dry cloth.
- Avoid the use of harsh cleaners and abrasives which may damage the finish.

IMPORTANT SAFETY INSTRUCTIONS

1. These instructions are provided for your safety. It is very important that they are read carefully and completely before assembling and installing the lighting fixture.
2. This product must be installed in accordance with the applicable installation codes by a professional familiar with the construction and operation of the product and the hazards involved.
3. The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with ground wire or equivalent protection system).
4. This fixture has been rated for up to three, two, OR one (3 - Large, 2 - Medium, 1 - Small) 60-watt maximum, TYPE A, medium base light bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

1. To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulbs.
2. Do not touch bulbs when fixture is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.

SMALL OR MEDIUM OR LARGE

ASSEMBLY

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to the junction box where the sconce will be installed.
3. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the fixture's ground wire around the green ground screw, then fix the green ground screw into the mounting plate (A).
4. Connect the hot wire to the hot junction box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
5. Mark the location of the mounting holes (J) on the wall using a pencil. Using the marks as a guide, drill holes for the wall anchors (B). Insert the wall anchors into the holes, using a hammer to fully insert until flush with the wall.
6. Attach the mounting plate (A) to the outlet box by driving the anchor screws (C) into the wall anchors (B). Screw the mounting screws (E) into the junction box with a screwdriver.
7. Attach the fixture base plate (G) with the attached sconce (H) to the mounting plate (A) by fitting the threaded bar (D) through the aligned holes in the fixture base plate (G). Tighten book plate nuts / thumb screws (F) onto the threaded bar (D).
8. Insert (3 - Large, 2 - Medium, 1 - Small) frosted light bulbs (K) not included, into threaded sockets (I).
9. Restore power to the junction box and test fixture.