

BR HOME  
KRISTOFF PENDANT




STYLE # 6002172



SMALL OR MEDIUM OR LARGE

## DIMENSIONS

Small	24" x 24" x 20"
Small Weight	12 lbs.
Medium	36" x 36" x 27.5"
Medium Weight	20 lbs.
Large	48" x 48" x 33"
Large Weight	30 lbs.


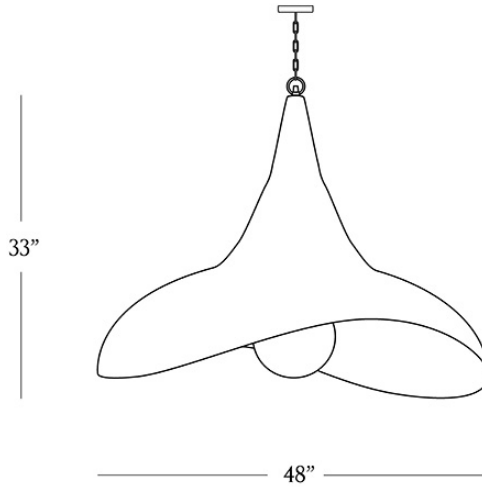


## RATING

Max Wattage	40-Watt maximum
Bulbs (Not Included)	Type A

## PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Threaded Tube (1)
- (C) Mounting Screws (2)
- (D) Earthing Screw (1)
- (E) Connectors (3)
- (F) Canopy + Chain Nut (1)
- (G) C-Rings (2)
- (H) Chain (1)
- (I) Bulb (not included)

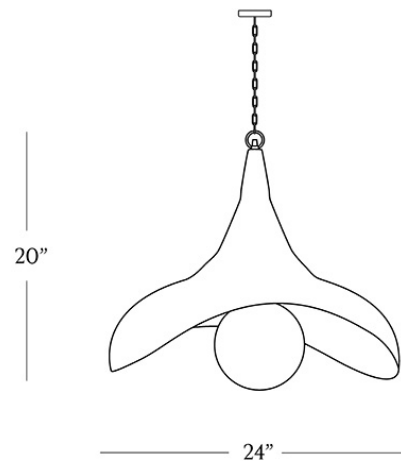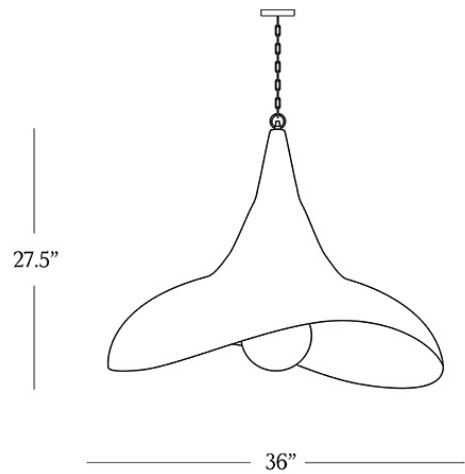

---

SMALL OR MEDIUM OR LARGE

## DETAILS

---

Part of the Andromeda Collection, this pendant light is hand-hammered and welded in a cloche shape, finished with antique bronze on the exterior and a rich, golden interior so it glows from within.

- Crafted of hammered iron
- 10' cord, 6' chain
- Hardwire fixture, professional installation recommended
- Made in India.

## CARE

---

- Dust regularly with a soft, dry cloth.
- Avoid the use of harsh cleaners and abrasives which may damage the finish.

[Reference our Measuring & Delivery Guide to accurately measure your space and avoid common delivery issues.](#)

## WARNINGS: STRANGULATION HAZARD

---

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

## IMPORTANT SAFETY INSTRUCTIONS

---

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

### BULBS

This lamp has been rated for (1) 40-watt maximum Type A standard light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

### VAULTED-CEILING COMPATIBILITY

This fixture is not vaulted-ceiling compatible.

### DIMMER-SWITCH COMPATIBILITY

This fixture is not dimmer-switch compatible.

## WARNINGS

---

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when lamp is illuminated. Keep flammable materials away from lit bulb.

---

SMALL OR MEDIUM OR LARGE

## ASSEMBLY

---

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
  2. Turn off power to the junction box where the fixture will be installed.
  3. Measure desired drop of fixture from ceiling, and remove any extra links from chain (H), if necessary.
  4. Insert threaded tube (B) halfway into mounting plate (A). Attach mounting plate (A) to ceiling outlet box using mounting screws (C).
  5. Pull wire from ceiling outlet box, and attach ground wire (usually green or bare wire) from ceiling box to ground wire on fixture with a plastic wire connector. Wrap this connection with electrical tape.
  6. Attach hot wire from ceiling box (usually black or smooth) with hot wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
  7. Attach neutral wire from ceiling box (usually white or ribbed) with neutral wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
  8. Slide canopy + chain nut (F) up and hold flush against ceiling. Screw the chain nut (F) onto the threaded tube (B) to hang the fixture.
  9. Insert Type A bulb (I) (not included).
  10. Restore power to the junction box and test fixture.
- II. Installation complete.

## HEIGHT ADJUSTMENT INSTRUCTIONS

---

### HEIGHT ADJUSTMENT INSTRUCTIONS

Determine drop measurement (ceiling to bottom of fixture) and adjust Chain (H) by adding/removing links.

### ATTENTION: ADJUST THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height will void the Laboratory Listing and Approvals. If the listing is voided, this means the product may no longer be safe for use as modified.