

BR HOME
MAIA LINEAR CHANDELIER



STYLE # 600254I




DIMENSIONS

Width	55"
Depth	13"
Height	31.5"

RATING

Max Wattage	25 Watt maximum
Bulbs (Not Included)	Type B

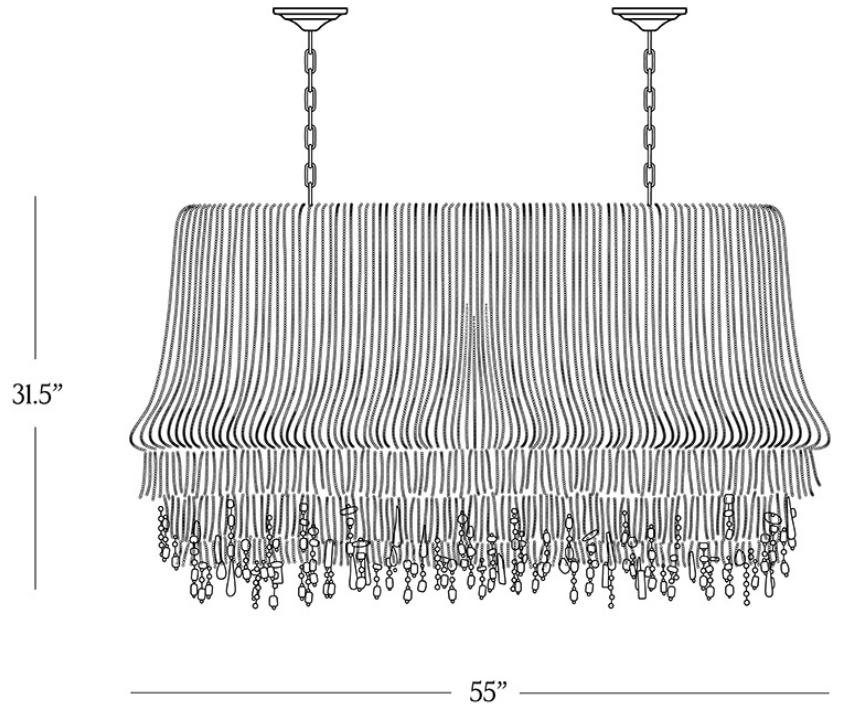

PARTS ENCLOSED

- (A) Ceiling Plate (1)
- (B) Canopy (1)
- (C) Chain (1)
- (D) Socket (12)
- (E) Bulb (not included) (12)
- (F) Canopy Screw (6)
- (H) Wire Connector (2)
- (I) Anchor Fastener (4)
- (J) Mounting Screw (UL) (2)

DETAILS

Rows of handmade glass beads in an inky hue cascade down the center of this rectangular chandelier, finished with a fringe of larger beads in an array of shapes and sizes for an organically ornate effect.

- Handcrafted glass beads on an iron frame.
- Hardwire fixture, professional installation recommended.
- Handmade in India.

CARE

- Dust regularly with a soft, dry cloth.
- Avoid the use of harsh cleaners and abrasives which may damage the finish.

Reference our [Measuring & Delivery Guide](#) to accurately measure your space and avoid common delivery issues.

WARNING: This product can expose you to chemicals including crystalline silica, toluene, wood dust and nickel, which are known to the State of California to cause birth defects or other reproductive harm.

For more information, go to www.P65Warnings.ca.gov

IMPORTANT SAFETY INSTRUCTIONS

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this light fixture.
3. This fixture has been rated for up to (12) 25 watt maximum type B bulb.

WARNINGS

1. Do not remove the lamp from its packaging by pulling on the power cord as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off the lamp and allow it to cool Prior to replacing light bulb(s).
3. Do not touch the bulb when fixture is turned on or look directly at Light bulb. This light fixture may contain lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm wash hands after installing, handling, cleaning or otherwise touching this light fixture.

ASSEMBLY

1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Measure desired drop of fixture from ceiling, and remove any unnecessary links from chain (C), if desired.
4. Drill holes on the ceiling corresponding with holes in ceiling plate (A) then knock the anchors Fastener (I).

Note: Anchors are used into the holes. Attach the ceiling plate (A) to the ceiling with Mounting screws UL (J) for concrete ceiling wooden ceiling only. Now attached the Canopy plate (B) to the ceiling plate (A) with canopy screw (F).

5. Pull wire from ceiling outlet box, and attach ground wire (usually green or bare wire) from ceiling box to ground wire on ceiling plate (A) with a screw.
6. Attach hot wire from ceiling (usually black) to hot wire on fixture with a plastic wire connector (H) and wrap this connection with electrical tape.
7. Attach neutral wire from ceiling box (usually white) with neutral wire on fixture with a plastic wire connector (H), and wrap this connection with electrical tape.
8. Attach the canopy (B) with ceiling plate (A) and tighten the round screws (F).
9. Insert (I2) 25-watt max type B bulb (E) (not included) as shown in picture, into the socket (D).
10. Restore power to the junction box and test lamp fixture. Now Installation is completed.