

BR HOME
CIRCE PENDANT



STYLE # 6002138



DIMENSIONS


Diameter	36"
Depth	12"
Height	36"
Weight	26 lbs.

RATING

Max Wattage	40 Watt maximum
Bulbs (Not Included)	Type A

PARTS ENCLOSED

- (A) Canopy (1)
- (B) Mounting Bracket (1)
- (C) Mounting Screw (2)
- (D) Nipple (1)
- (E) Canopy Loop (1)
- (F) Wire Connector (2)
- (G) Hex Nuts (1)
- (H) Collar (1)
- (I) Socket (1)
- (J) Bulb (not included) (2)
- (K) Chain (1)
- (L) Connecting Rod (1)
- (M) Knob (1)
- (N) Back Plate (2)

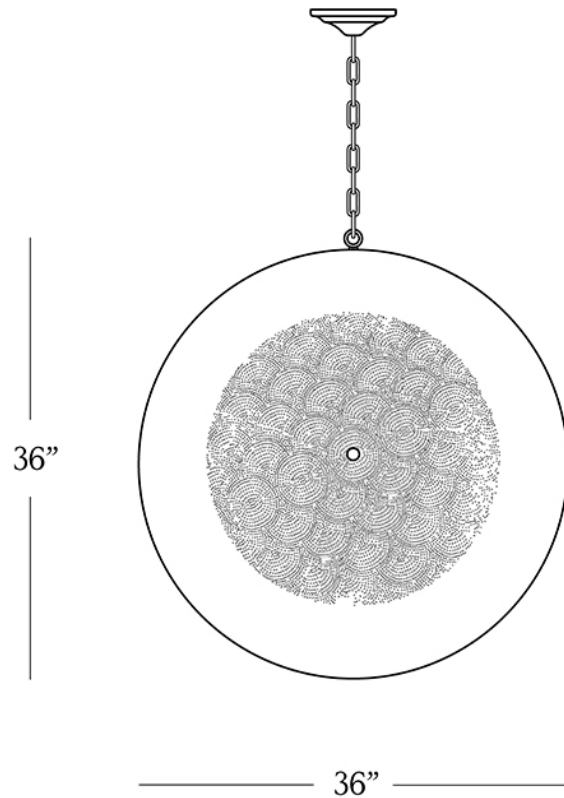

DETAILS

Inspired by the rich geometric patterns of Moroccan lamps, this pendant lamp uses small perforated patterns in hand-hammered iron to bring out the rich color of its golden finish, casting an irregular pattern of dispersed light.

- Crafted of hammered iron.
- 6' cord length.
- Hardwire fixture, professional installation recommended.
- Made in India.

CARE

- Dust regularly with a soft, dry cloth.
- Avoid the use of harsh cleaners and abrasives which may damage the finish.

[Reference our Measuring & Delivery Guide to accurately measure your space and avoid common delivery issues.](#)

IMPORTANT SAFETY INSTRUCTIONS

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this light fixture.
3. This fixture has been rated for up to (2) 40 watt maximum type A bulbs.
4. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

1. Do not remove the lamp from its packaging by pulling on the power cord as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb(s).
3. Do not touch bulb when fixture is turned on or look directly at light bulb.

ASSEMBLY

- I. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Measure desired drop of fixture from ceiling, and remove any unnecessary links from chain (K), if desired.
4. Attach Nipple (D) to Mounting Bracket (B) and use a Hex Nut (G) on each side to lock in place Thread Canopy Loop (E) onto longer end of Nipple.
5. Attach Mounting Hardware to Junction Box using Mounting Screws (C). Use screwdriver to firmly tighten and secure.
6. Trim wires leaving at least 6" to make electrical connection. Strip ends of 3/4" insulation.
7. Attach bare (or green) ground wire from fixture to bare (or green) ground wire in junction box using Wire Connector (F). Wrap both around green ground screw on Mounting Bracket (B) and firmly tighten.
8. Slide Ceiling Canopy (A) over Junction Box followed by Collar (H). Thread Collar onto Canopy Loop (E) and tighten until Canopy is firmly pressed against ceiling.
9. Insert (2) 40-watt max type A bulb (J) (not included) as shown in picture, into the socket (I).
10. Restore power to the junction box and test lamp fixture.
- II. Installation is complete.