

BR HOME
ETTA PENDANT



STYLE # 6002165



DIMENSIONS


Diameter	30.5"
Height	60.5"
Weight	32.5 lbs.

RATING

Max Wattage	40-watt maximum
Bulbs (Not Included)	Type A

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Threaded Tube (1)
- (C) Mounting Screws (2)
- (D) Earthing Screw (1)
- (E) Connectors (3)
- (F) Canopy + Chain Nut (1)
- (G) C-Rings (2)
- (H) Chain (1)
- (I) Bulb (not included)

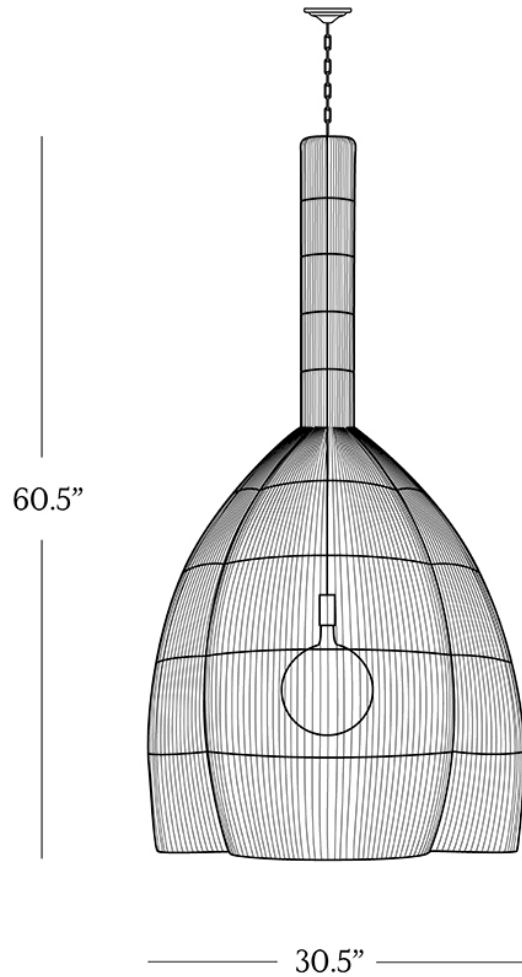

DETAILS

Wires wrap around the metal frame of this sculptural pendant lamp. Each piece is expertly woven by hand, ensuring no two pieces are exactly alike.

- Crafted from handwoven wires on an iron frame.
- 10' cord, 6' chain.
- Hardwire fixture, professional installation recommended.
- Made in India.

CARE

- Dust regularly with a soft, dry cloth.
- Avoid the use of harsh cleaners and abrasives which may damage the finish.

[Reference our Measuring & Delivery Guide to accurately measure your space and avoid common delivery issues.](#)

WARNINGS: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

IMPORTANT SAFETY INSTRUCTIONS

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING DIRECTLY TO A JUNCTION BOX. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

BULBS

This lamp has been rated for (1) 40-watt maximum Type A standard light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED-CEILING COMPATIBILITY

This fixture is not vaulted-ceiling compatible.

DIMMER-SWITCH COMPATIBILITY

This fixture is not dimmer-switch compatible.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as damage may result. Do not connect electricity until the lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off lamp and allow it to cool prior to replacing the light bulb. Do not touch or look directly at the bulb when lamp is illuminated. Keep flammable materials away from lit bulb.

ASSEMBLY

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE FUSE BOX OR CIRCUIT BREAKER PANEL.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn off power to the junction box where the fixture will be installed.
3. Measure desired drop of fixture from ceiling, and remove any extra links from chain (H), if necessary.
4. Insert threaded tube (B) halfway into mounting plate (A). Attach mounting plate (A) to ceiling outlet box using mounting screws (C).
5. Pull wire from ceiling outlet box, and attach ground wire (usually green or bare wire) from ceiling box to ground wire on fixture with a plastic wire connector. Wrap this connection with electrical tape.
6. Attach hot wire from ceiling box (usually black or smooth) with hot wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
7. Attach neutral wire from ceiling box (usually white or ribbed) with neutral wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
8. Slide canopy + chain nut (F) up and hold flush against ceiling. Screw the chain nut (F) onto the threaded tube (B) to hang the fixture.
9. Insert Type A bulb (I) (not included).
10. Restore power to the junction box and test fixture.
- II. Installation complete.

HEIGHT ADJUSTMENT INSTRUCTIONS

HEIGHT ADJUSTMENT INSTRUCTIONS

Determine drop measurement (ceiling to bottom of fixture) and adjust Chain (H) by adding/removing links.

ATTENTION: ADJUST THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height will void the Laboratory Listing and Approvals. If the listing is voided, this means the product may no longer be safe for use as modified.