# R HOME AMELIA PENDANT





AMELIA PENDANT B. HOME

# SMALL OR LARGE

# **DIMENSIONS**

Small 8" x 8" x 36"

Small Weight 7 lbs.

Large 10" x 10" x 40"

Large Weight 9 lbs.

# **RATING**


Max Wattage 40-watt maximum

Bulbs Type A

(Not Included)

# PARTS ENCLOSED

- (A) Canopy (I)
- (B) Mounting Bracket (I)
- (C) Mounting Screw (2)
- (D) Nipple (I)
- (E) Canopy Loop (I)
- (F) wire Connector (2)
- (G) Hex Nuts (I)
- (H) Collar (I)
- (I) Socket (I)
- (J) Bulb (not included) (I)
- (K) Chain (I)

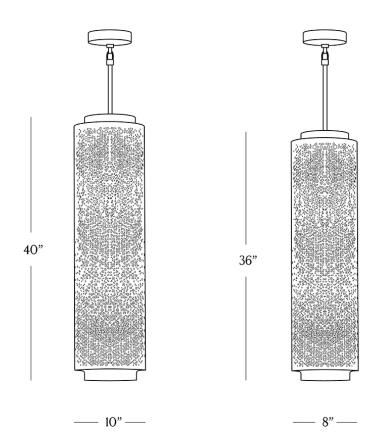

AMELIA PENDANT R HOME

SMALL OR LARGE

# **DETAILS**

Inspired by the rich geometric patterns of Moroccan lamps, this pendant lamp uses perforations to enhance its etched forms, spread across a hand-hammered surface that's finished in rich, antique gold.

- · Crafted of hammered iron.
- 6' cord.
- Hardwire fixture, professional installation recommended.
- · Made in India.

### CARE

- · Dust regularly with a soft, dry cloth.
- Avoid the use of harsh cleaners and abrasives which may damage the finish.

Reference our Measuring & Delivery Guide to accurately measure your space and avoid common delivery issues.

### IMPORTANT SAFETY INSTRUCTIONS

- I. We recommend installation by a licensed electrician.
- 2. To avoid the risk of fire, do not exceed the recommended wattage for this light fixture.
- 3. This fixture has been rated for up (I) 40 watt maximum type A bulb.

### **WARNINGS**

- Do not remove the lamp form its packaging by pulling on the power cord as a bad connection may result.
- 2. To avoid the risk of fire, electrical shock, or personal injury, turn off the lamp and allow it to cool prior to replacing light bulb(s).
- Do not touch the bulb when fixture is turned on or touch directly at Light bulb.

AMELIA PENDANT B. HOME

SMALL OR LARGE

### **ASSEMBLY**

- I. Carefully remove all parts from the box and remove all protective coverings.
- 2. Turn OFF power to the junction box where the lamp will be installed.
- Measure desired drop of fixture from ceiling, and remove any unnecessary links from chain (K), if desired.
- 4. Attach Nipple (D) to Mounting Bracket (B) and use a Hex Nut (G) on each side to lock in place Thread Canopy Look (E) onto longer end of Nipple.
- 5. Attach Mounting Hardware to Junction Box using Mounting Screws (C). Use screwdriver to firmly tighten and secure.
- 6. Trim wires leaving at least 6" to make electrical connection. Strip ends of 3/4" insulation. Attach bare (or green) ground wire from fixture to bare (or green) ground wire in junction box using Wire Connector (F). Wrap both around green ground screw on Mounting Bracket (B) and firmly tighten.
- 7. Slide Ceiling Canopy (A) over Junction Box followed by Collar (H). Thread Collar onto Canopy Loop (E) and tighten until Canopy is firmly pressed against ceiling.
- 8. Insert 40-watt max type A bulb (J) (not included) as shown in picture, into the socket (I).
- 9. Restore power to the junction box and test lamp fixture. Installation is complete.